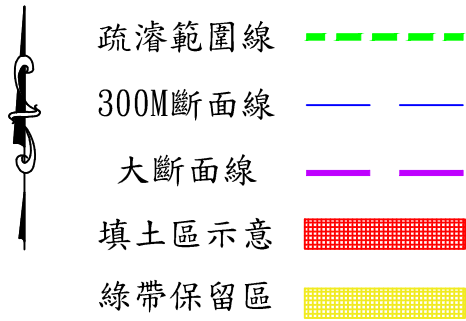


- 
- 疏濬範圍線
- 300M斷面線
- 大斷面線
- 填土區示意
- 綠帶保留區

本作業疏濬範圍蘭陽溪30~34間斷面

全長計1,700尺

寬度計300尺

疏濬土方預計50萬立方公尺

填土區為示意位置圖，實際情況依工程司指示辦理



斷面樁成果			
二度分帶TWD97-2010坐標系統			
點 名	縱座標N(Y)	橫座標E(X)	高 程
L031	2733628.934	318663.889	56.618
R030	2732795.187	319308.445	51.672
R031	2732707.941	318630.976	58.799
R032	2732557.894	318192.244	63.497
R033	2732429.994	317904.738	66.402
R034	2732246.977	317608.551	69.615
R035	2732212.507	316924.705	78.548
R036	2732021.380	316397.083	86.410
R037	2731800.798	315991.626	91.016
L030	2733531.027	319164.477	52.037
L032	2733814.433	318250.120	59.417
L033	2734116.189	317865.118	63.734
L034	2733606.733	317086.161	67.978
L035	2733457.864	316695.712	72.642
L036	2732979.042	315888.426	126.434
L037	2732655.253	315347.978	89.976

範圍樁成果		
二度分帶TWD97-2010坐標系統		
點 名	縱座標N(Y)	橫座標E(X)
L0K+000	2733010.066	318892.210
L0K+050	2733009.438	318842.214
L0K+100	2733008.811	318792.218
L0K+150	2733008.183	318742.222
L0K+200	2733007.555	318692.226
L0K+250	2733006.928	318642.230
L0K+300	2733006.300	318592.234
L0K+350	2733005.672	318542.238
L0K+400	2733005.045	318492.241
L0K+450	2733004.417	318442.245
L0K+500	2733003.789	318392.249
L0K+550	2733003.162	318342.253
L0K+600	2733002.534	318292.257
L0K+650	2733001.906	318242.261
L0K+700	2733001.279	318192.265
L0K+750	2733000.651	318142.269
L0K+800	2733000.023	318092.273
L0K+850	2732999.396	318042.277
L0K+900	2732998.768	317992.281
L0K+950	2732998.140	317942.285
L1K+000	2732997.513	317892.289
L1K+050	2732996.885	317842.293
L1K+100	2732996.257	317792.297
L1K+150	2732995.629	317742.301
L1K+200	2732995.001	317692.305
L1K+250	2732984.373	317642.309
L1K+300	2732973.745	317592.313
L1K+350	2732963.117	317542.317
L1K+400	2732952.489	317492.321
L1K+450	2732941.861	317442.325
L1K+500	2732931.233	317392.329
L1K+550	2732920.605	317342.333
L1K+600	2732910.000	317292.337
R0K+000	2733310.042	318888.444
R0K+050	2733309.415	318838.448
R0K+100	2733308.787	318788.452
R0K+150	2733308.159	318738.456
R0K+200	2733307.532	318688.460
R0K+250	2733306.904	318638.464
R0K+300	2733306.276	318588.468
R0K+350	2733305.649	318538.472
R0K+400	2733305.021	318488.476
R0K+450	2733304.393	318438.480
R0K+500	2733303.766	318388.483
R0K+550	2733303.138	318338.487
R0K+600	2733302.510	318288.491
R0K+650	2733301.883	318238.495
R0K+700	2733301.255	318188.499
R0K+750	2733300.627	318138.503
R0K+800	2733300.000	318088.507
R0K+850	2733299.372	318038.511
R0K+900	2733298.744	317988.515
R0K+950	2733298.117	317938.519
R1K+000	2733297.489	317888.523
R1K+050	2733296.862	317838.527
R1K+100	2733296.234	317788.531
R1K+150	2733294.686	317732.795
R1K+200	2733290.322	317675.466
R1K+250	2733283.099	317618.428
R1K+300	2733273.034	317561.822
R1K+350	2733260.153	317505.789
R1K+400	2733244.487	317450.471
R1K+450	2733226.076	317396.004
R1K+500	2733204.966	317342.526
R1K+550	2733181.540	317290.830
R1K+600	2733159.970	317245.722



經濟部水利署
第一河川局

工程名稱
PROJECT TITLE

圖 名
DRAWING NAME

蘭陽溪30~34斷面間河段疏濬工程兼供土石
採售分離作業(支出)

疏濬範圍與地理位置示意圖

設計
Designed

校核
Checked

課長
Chief

副局長
Deputy
Director

局 長
Director

比例尺
SCALE

單 位
UNIT

0

單位

圖 號
DRAWING NO.

03
G

第 3 頁
共 28 頁